

## Model 7130

### HD DA and Downconverter

The 7130 module has an HD SDI input with HD SDI, SD SDI and composite outputs, serving as both a downconverter and a distribution amplifier. If an SD SDI signal is input to the 7130, SD will pass to the outputs.

The 7130 performs automatic color space and gamma conversion to accommodate the differences between HD and SD. Output aspect ratio is selectable.

#### Audio Handling

Two channels of analog audio output are provided for monitoring. Any of the sixteen embedded channels can be mapped and mixed to form these outputs.

Embedded audio is safely bypassed around the video with the lip sync preserved. Sixteen channels of embedded audio are supported. Audio processing is performed at 24 bit resolution.

#### Control

The 7130 can be configured locally or controlled and configured remotely with Avenue Touch Screens, Express Panels, or Avenue PC Software. Alarm generation, configurable user levels, module lock out, and customizable menus are just some of the tools included in the Avenue control system.

#### Features


- » HD Downconverter and Distribution Amplifier
- » Up to four processed SD SDI outputs
- » Four SDI DA outputs
- » Up to four composite outputs
- » Analog Audio output for monitoring
- » Downconverts HD 720p or 1080i to SD
- » Distribution Amplifier for any HD or SD signal
- » Supports WSS and AFD
- » Translates HD closed captioning to SD closed captioning
- » Passes 16 channels of embedded audio
- » 2 channels of analog audio for monitoring
- » Auto detection of input standard and frame rate
- » Local and remote control

#### Meta Data

HD closed captioning is carried in data packets in the vertical interval ancillary data space. The 7130 properly translates HD caption data to traditional SD captioning (line 21 or 23) so that closed captioning content is converted transparently between video standards and formats.

#### Automatic Aspect Ratio Conversion

The 7130 uses WSS (Wide Screen Signaling) and AFD (Active Format Description) to mark or identify the aspect ratio of the video content. These flags are read at the input of the module.

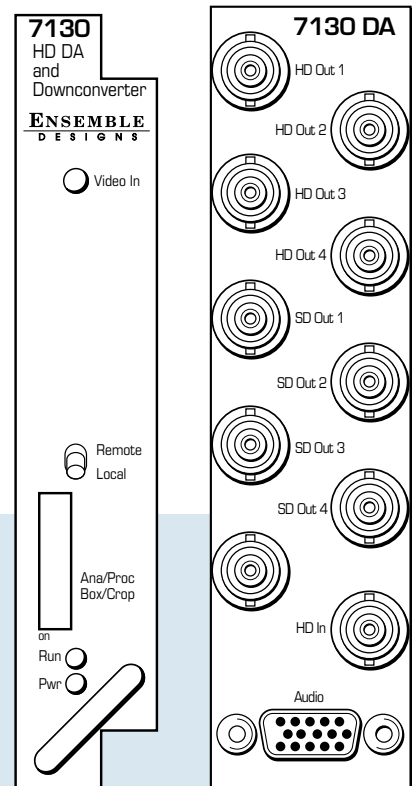

**Serial Digital Input**

<b>Number</b>	One
<b>Signal Type</b>	HD Serial Digital 1.485 Gb/s SMPTE 274M, 292M or 296M, or SD Serial Digital 270 Mb/s SMPTE 259M (Both 525 and 625 SD standards)
<b>Impedance</b>	75 Ω, BNC
<b>Return Loss</b>	>15 dB
<b>Max Cable Length</b>	
270 Mb/s	300 meters Belden 1694A
1.485 Gb/s	100 meters Belden 1694A
<b>Automatic Cable Input Equalization</b>	

**Standards Supported**

1080i (SMPTE 274M -4,5,6)	50, 59.94
720p (SMPTE 296M -1,2,3)	50, 59.94
525i	59.94, 625i 50

**Conversion Directions**

**Downconversion from**  
1080i/59.94 or 720p/59.94 to 525 (NTSC), and  
1080i/50 or 720p/50 to 625 (PAL)

**Serial Digital DA Outputs (unprocessed)**

<b>Number</b>	Four
<b>Signal Type</b>	HD or SD, follows input
<b>Impedance</b>	75 Ω
<b>Return Loss</b>	>15 dB
<b>Output DC</b>	None (AC coupled)
<b>Delay</b>	None

**SD Serial Digital Outputs (processed)**

<b>Number</b>	Four max Zero to four, jumper selectable BNCs shared with composite outputs
<b>Signal Type</b>	SD Serial Digital 270 Mb/s SMPTE 259M
<b>Impedance</b>	75 Ω
<b>Return Loss</b>	>15 dB
<b>Output DC</b>	None (AC coupled)
<b>Delay</b>	<10 lines when downconverted from HD

**Analog Video Output**

<b>Number</b>	Up to four Zero to four, jumper selectable BNCs shared with SD SDI outputs
<b>Signal Type</b>	PAL or NTSC Composite
<b>Impedance</b>	75 Ω
<b>Return Loss</b>	>40 dB
<b>Output DC</b>	<50 mV
<b>Resolution</b>	12+ bit processing
<b>Signal to Noise</b>	>65 dB
<b>Frequency Response</b>	±0.1 dB, 0 to 5.5 MHz
<b>K Factor</b>	<1%
<b>Sch Phase error</b>	<±2 degrees
<b>Differential Phase</b>	<1 degree
<b>Differential Gain</b>	<1%
<b>Delay</b>	<10 lines when downconverted from HD

**Analog Audio Output**

<b>Number</b>	Four (selectable from sixteen)
<b>Signal Type</b>	Balanced, transformerless
<b>Impedance</b>	30 Ω
<b>Maximum Output Level</b>	24 dBu
<b>Resolution</b>	24 bits, 128x Oversampled
<b>Reference Level</b>	-10 dBu to +4 dBu
<b>Frequency Response</b>	±0.1 dB, 20 Hz to 20 kHz
<b>Crosstalk</b>	<102 dB
<b>Dynamic Range</b>	>106 dB

**Embedded Output**

Support for all four groups (16 channels) from input to output

**General Specifications**

<b>Power Consumption</b>	10 watts
<b>Temperature Range</b>	0 to 40°C ambient (all specs met)
<b>Relative Humidity</b>	0 to 95%, noncondensing
<b>Altitude</b>	0 to 10,000 ft

