

BrightEye 75



Analog/SD SDI to SDI/Optical Converter with TBC and Frame Sync


BrightEye 75 is an analog video to digital converter and audio embedder. Standard definition component or composite, or high definition analog component video is accepted on the input BNCs. Two channels of analog audio are input on a plugable Phoenix connector.

This unit is perfect for use with HD cameras or other devices with analog I/O. The digital output will carry the full, un-compressed input, synchronous to a genlock reference. You can turn a hand-held HD camera into a digital source. A three camera, live studio suddenly becomes affordable.

The built-in TBC / Frame Synchronizer allows you to feed asynchronous or noisy signals to the BrightEye 75. The input is digitized to 12 bits of resolution and time base corrected by a noise tolerant tracking circuit. An external reference input allows genlock to a house reference.

Input selection, gain control, and TBC enable is provided through the front panel interface. Video levels can be adjusted through BrightEye Mac or PC software.

The video and audio signals are embedded and presented on a BNC. The output follows the SD or HD input standard.

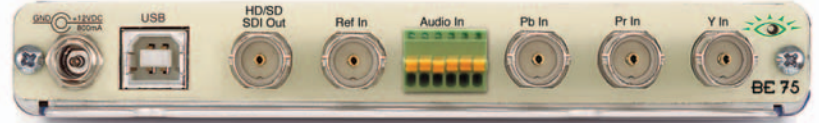

- ▶ Use with Analog HD Cameras and Set Top Boxes
- ▶ Turn Analog Camera Into Digital HD Source
- ▶ Analog HD or SD Inputs
- ▶ Analog Audio Inputs
- ▶ Serial Digital HD or SD Embedded Output

Max Input Level	24 dBu
CMRR	>60dB, 20Hz to 10KHz
Quantization	24 bits, 128x Oversampled
Sample Rate	48 KHz
Reference Level	-10 dBu or +4 dBu
Frequency Response	±0.1dB, 20Hz to 20KHz
Crosstalk	<106 dB
Dynamic Range	>106 dB

Serial Digital Output

Number	One
Type	Follows input standard HD Serial Digital 1.485 Gb/s SMPTE 274M or 296M or SD Serial Digital 270Mb/s SMPTE 259M-C
Impedance	75 Ω
Return Loss	>15 dB
Max Cable Length	100 Meters for HD 300 Meters for SD (Belden 1694A or equiv.)

HD Standards Supported	1080i (SMPTE 274M -4,5,6) 50, 59.94 or 60 Hz 720p (SMPTE 296M -1,2,3) 50, 59.94 or 60 Hz 1080p (SMPTE 274M -9,10,11) 23.98,24, 25 Hz 1080sF (RP211 -14,15,16) 23.98, 24, 25Hz
------------------------	--

Embedded Output (In Serial Output)

Group Assign	One of four groups
Channels	Two
Bit Depth	24 Bit

Reference Input

Number	One
Type	1 V p-p Composite Video, PAL or NTSC
Impedance	75 Ω
Return Loss	>40 dB

General Specifications

Size	5.625" W x 0.8" H x 5.5" D (143 mm x 20 mm x 140 mm) including connectors
Power	12 volts, 7 watts (100-230 VAC modular power supply)
Temperature Range	0 to 40° C ambient
Relative Humidity	0 to 95° non-condensing

► Specifications

Analog Video Input

Number	One
Type	HD or SD :Y, Pr, Pb (SMPTE or Beta levels) HD or SD: Analog Component RGB (sync on green) Analog Composite PAL or NTSC Analog S-Video PAL or NTSC
Resolution	Digitized at 12 bits
Impedance	75 Ω
Return Loss	>40 dB
Input DC	+/-1 volt DC
Input Hum	<100 mV

Analog Audio Inputs

Number	Two
Type	Balanced
Impedance	>15K Ω