

BrightEye 92-M


HD Downconverter

BrightEye 92-M will downconvert any type of HD signal and provides both an SD SDI output and an analog composite output that are suitable for broadcast or monitoring. The built-in Frame Synchronizer allows you to feed asynchronous signals to the BrightEye 92-M. An external reference input allows genlock to a house reference. All vertical interval data and closed captioning is faithfully passed.

Audio monitoring is easy with BrightEye 92-M's convenient 3.5mm mini jack. Just select the audio channels you want to monitor from the front panel and plug in a headset.

The HDMI connector on the rear of the unit provides a future proof monitoring interface. Plug it into most computer monitors for confidence monitoring of your feed.

Input selection, gain control, and test pattern controls are provided through the front panel interface. Audio presence LEDs indicate which channels are detected. Controls for crop, letterbox and pillarbox are accessed from the front panel or BrightEye Mac or PC software.

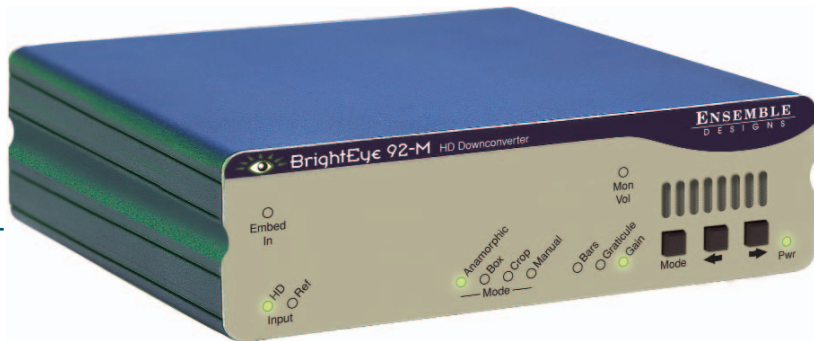

- ▶ Downconversion for monitoring or broadcast
- ▶ SD Digital and Analog Composite Video Outputs
- ▶ Analog Audio Monitor Output
- ▶ HDMI Output for Monitoring

► Specifications

Serial Digital Input

Number	One
Signal Type	1.485Gb/s HD Serial Digital (SMPTE 274M or 296M)
Impedance	75 Ω
Return Loss	>15dB
Max Cable Length	100 meters for 1.485 Gb/s

Reference Input

Number	One
Type	1 V p-p Composite Video PAL or NTSC or Tri-Level Sync
Impedance	75 Ω
Return Loss	>40 dB

Analog Video Output

Number	One
Type	Composite PAL or NTSC
Return Loss	>40 dB
Output	DC < 100 mV

Serial Digital Output

Number	Two
Type	SD Serial Digital 270Mb/s SMPTE 259M-C
Impedance	75 Ω
Return Loss	>15 dB
Max Cable Length	100 Meters for HD (Belden 1694A or equiv.)

HD Standards Supported

1080i (SMPTE 274M -4,5,6)	50, 59.94 or 60 Hz
720p (SMPTE 296M -1,2,3)	50, 59.94 or 60 Hz
1080p (SMPTE 274M -9,10,11)	23.98,24, 25 Hz
1080sF (RP211 -14,15,16)	23.98, 24, 25Hz

Monitor Output

Number	One
Connectorization	HDMI

Audio Monitoring Output

Number	One (Select from eight channels)
Connectorization	3.5mm mono mini jack

General Specifications

Size	5.625" W x 1.7" H x 5.5" D (143 mm x 40 mm x 140 mm) including connectors
Power	12 volts, 7 watts (100-230 VAC modular power supply)
Temperature Range	0 to 40° C ambient
Relative Humidity	0 to 95° non-condensing